

SNYDER



Equipment, Inc.

Storing, Rolling, Lifting since 1947

PRODUCT INFORMATION

PRESTO FILTERS

2946 Larimer St. Denver, CO 80205
303-295-1100 / 800-373-7693
FAX 303-295-2464
Email info@snyderequipment.com
www.snyderequipment.com

Standard Tilt Tables

Model Number	Tilt Capacity	Degree of Tilt	Lowered Height	Standard Base	Standard Platform	Maximum Platform	Lifting Speed	Shipping Weight
TT30 Series								
TT30 - 10	1000 lbs	30	6 1/2"	24"x30"	24"x36"	36"x48"	15 sec	260 lbs
TT30 - 15	1500 lbs	30	6 1/2"	24"x30"	24"x36"	36"x48"	15 sec	275 lbs
TT30 - 20	2000 lbs	30	7 1/2"	24"x36"	24"x36"	50"x50"	10 sec	480 lbs
TT30 - 40	4000 lbs	30	7 1/2"	24"x36"	24"x36"	50"x50"	11 sec	470 lbs
TT30 - 60	6000 lbs	30	7 1/2"	24"x36"	24"x36"	50"x50"	14 sec	480 lbs
TT45 Series								
TT45 - 10	1000 lbs	45	6 1/2"	24"x30"	24"x36"	36"x48"	22 sec	260 lbs
TT45 - 15	1500 lbs	45	6 1/2"	24"x30"	24"x36"	36"x48"	22 sec	275 lbs
TT45 - 20	2000 lbs	45	7 1/2"	24"x36"	24"x36"	50"x50"	15 sec	460 lbs
TT45 - 40	4000 lbs	45	7 1/2"	24"x36"	24"x36"	50"x50"	16 sec	470 lbs
TT45 - 60	6000 lbs	45	7 1/2"	24"x36"	24"x36"	50"x50"	20 sec	480 lbs
TT60 Series								
TT60 - 10	1000 lbs	60	6 1/2"	24"x30"	24"x36"	36"x48"	30 sec	260 lbs
TT60 - 15	1500 lbs	60	6 1/2"	24"x30"	24"x36"	36"x48"	30 sec	275 lbs



Features

- 1000 - 6000 lb. capacity
- 30, 45 & 60 degree tilt
- Internal 1/2 HP 115/1/60 power unit.
- Optional power units available
- Powered down cylinders on TT60 Series
- Custom platforms available
- 8" standard lip, optional lips up to 24"
- TT-30 & TT-45 units can be mounted to the floor, on floor stands or on top of scissor lifts
- Hand held control with 8' coil cord
- Optional foot control available
- 12" lip standard on TT-60 series tilters

Please specify voltage and control type when ordering

Wide Base Tilt Tables

Model Number	Tilt Capacity	Degree of Tilt	Lowered Height	Standard Base	Standard Platform	Maximum Platform	Lifting Speed	Shipping Weight
WT30/45 Series								
WT30/45-20	2000 lbs	30/45	71/2"	36" x 42"	36" x 42"	60" x 60"	19/29 sec	540 lbs
WT30/45-40	4000 lbs	30/45	71/2"	36" x 42"	36" x 42"	60" x 60"	20/30 sec	560 lbs
WT30/45-60	6000 lbs	30/45	71/2"	36" x 42"	36" x 42"	60" x 60"	29/39 sec	580 lbs
WT60 Series								
WT60-20	2000 lbs	60	81/2"	36" x 42"	36" x 42"	60" x 60"	40 sec	680 lbs
WT60-40	4000 lbs	60	81/2"	36" x 42"	36" x 42"	60" x 60"	42 sec	700 lbs
WT60-60	6000 lbs	60	81/2"	36" x 42"	36" x 42"	60" x 60"	55 sec	720 lbs
WT90 Series								
WT90-20	2000 lbs	90	8 1/2"	36" x 42"	36" x 42"	60" x 60"	60 sec	680 lbs
WT90-40	4000 lbs	90	8 1/2"	36" x 42"	36" x 42"	60" x 60"	64 sec	700 lbs
WT90-60	6000 lbs	90	8 1/2"	36" x 42"	36" x 42"	60" x 60"	83 sec	720 lbs

Features


- 2000 - 6000 lb. capacity
- 30, 45, 60 & 90 degree tilt
- Internal 1 HP 115/1/60 power unit.
- Optional power units available
- Powered down cylinders on WT60 and WT90 Series
- Custom platforms available
- 8" standard lip, optional lips up to 24"
- WT-30 & WT-45 units can be mounted to the floor, on floor stands or on top of scissor lifts
- Hand held control with 8' coil cord
- Optional foot control available
- 12" lip standard on WT-60 and WT-90 Series tilters

Please specify voltage and control type when ordering



Floor Level Lift & Tilt

Model Number	Load Capacity	Platform Size	Lowered Height	Lifting Height	Dimensions W /L	Lifting Speed	Shipping Weight
XZT 44 Series							
XZT44 - 20	2000 lbs	44" x 48"	3/8"	33 3/8"	68" x 61"	39 sec	1295 lbs
XZT44 - 40	4000 lbs	44" x 48"	1/2"	33 1/2"	68" x 61"	43 sec	1370 lbs
XZT 50 Series							
XZT50 - 20	2000 lbs	50" x 48"	3/8"	33 3/8"	74" x 61"	40 sec	1370 lbs
XZT50 - 40	4000 lbs	50" x 48"	1/2"	33 1/2"	74" x 61"	44 sec	1455 lbs

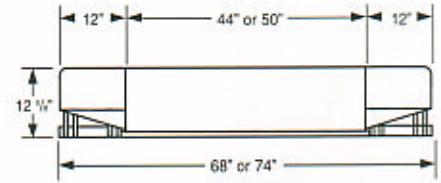

Features

- 2000 - 4000 lb. capacity
- 33" vertical travel
- 30 degree tilt
- Pedestal mounted control available
- Optional foot control available
- External 1 HP 115/1/60 power unit
- Optional power units available
- Floor level lowered height
- No ramps or pit required
- Custom designs available

Tilt Tables options on pages 24



Scissor Lift & Tilt

Model Number	Lift Capacity	Lowered Height	Raised Height	Standard Base	Maximum Platform	Lifting Speed	Tilting Speed	Shipping Weight
X3WT Series								
X3WT36-20	2000 lbs	11 1/2"	47 1/2"	36" x 48"	60" x 60"	42 sec	8 sec	1320 lbs
X3WT36-40	4000 lbs	11 1/2"	47 1/2"	36" x 48"	60" x 60"	43 sec	8 sec	1370 lbs
X4WT Series								
X4WT36-20	2000 lbs	11 1/2"	47 1/2"	48" x 48"	72" x 60"	42 sec	8 sec	1400 lbs
X4WT36-40	4000 lbs	11 1/2"	47 1/2"	48" x 48"	72" x 60"	43 sec	8 sec	1450 lbs

Features

- 2000 - 4000 lb. capacity
- 11 1/2" lowered height
- Push-button control w/ 8' coil cord
- Optional foot control available
- Optional pedestal control available
- Internal 1 HP 115/1/60 power unit
- One power unit controls lift & tilt
- Independent lift & tilt functions
- 30 & 45 degree tilts
- Custom Designs available

Tilt Tables options on pages 24



Shown with optional control pedestal

Pneumatic Scissor Lift & Tilt

Model Number	Lift Capacity	Vertical Travel	Lowered Height	Raised Height	Base Size W / L	Platform Size W / L	Degree of Tilt	Shipping Weight
AXT10 Series								
AXT10-3648	1000 lbs	21"	15"	36"	36" x 48"	36" x 48"	30	1140 lbs
AXT10-4848	1000 lbs	21"	15"	36"	36" x 48"	48" x 48"	30	1250 lbs
AXT10-4856	1000 lbs	21"	15"	36"	36" x 48"	56" x 48"	30	1340 lbs
AXT10-4860	1000 lbs	21"	15"	36"	36" x 48"	60" x 48"	30	1390 lbs
AXT20 Series								
AXT20-3648	2000 lbs	24"	15"	39"	36" x 48"	36" x 48"	30	1315 lbs
AXT20-4848	2000 lbs	24"	15"	39"	36" x 48"	48" x 48"	30	1345 lbs
AXT20-4856	2000 lbs	24"	15"	39"	36" x 48"	56" x 48"	30	1400 lbs
AXT20-4860	2000 lbs	24"	15"	39"	36" x 48"	60" x 48"	30	1490 lbs
AXT40 Series								
AXT40-4848	4000 lbs	24"	15"	39"	48" x 48"	48" x 48"	30	1490 lbs
AXT40-4856	4000 lbs	24"	15"	39"	48" x 48"	56" x 48"	30	1545 lbs
AXT40-4860	4000 lbs	24"	15"	39"	48" x 48"	60" x 48"	30	1585 lbs

Features

- 1000 - 4000 lb. capacity
- 21" & 24" vertical travel
- 30 degree tilt
- Pedestal mounted control
- Optional foot control
- Lifetime warranty on Firestone Actuator
- Air requirements 80 psi @ 15 cfm
- AXT units designed for stationary use
- Optional motion stabilizer
- Custom designs available




Heavy Duty Pneumatic Scissor Lift & Tilt



Model Number	Lift Capacity	Degree of Tilt	Vertical Travel	Lowered Height	Raised Height	Base Size W / L	Platform Size W / L	Shipping Weight
AXST20 Series								
AXST20-3648	2000 lbs	30	24"	19"	43"	36" x 48"	36" x 48"	1150 lbs
AXST20-4848	2000 lbs	30	24"	19"	43"	36" x 48"	48" x 48"	1270 lbs
AXST20-4856	2000 lbs	30	24"	19"	43"	36" x 48"	56" x 48"	1410 lbs
AXST20-4860	2000 lbs	30	24"	19"	43"	36" x 48"	60" x 48"	1490 lbs
AXST40 Series								
AXST40-3648	4000 lbs	30	24"	19"	43"	36" x 48"	36" x 48"	1400 lbs
AXST40-4848	4000 lbs	30	24"	19"	43"	36" x 48"	48" x 48"	1520 lbs
AXST40-4856	4000 lbs	30	24"	19"	43"	36" x 48"	56" x 48"	1640 lbs
AXST40-4860	4000 lbs	30	24"	19"	43"	36" x 48"	60" x 48"	1720 lbs
AXST60 Series								
AXST60-4848	6000 lbs	30	24"	19"	43"	48" x 48"	48" x 48"	1610 lbs
AXST60-4856	6000 lbs	30	24"	19"	43"	48" x 48"	56" x 48"	1730 lbs
AXST60-4860	6000 lbs	30	24"	19"	43"	48" x 48"	60" x 48"	1810 lbs
AXST80 Series								
AXST80-4848	8000 lbs	30	23"	20"	43"	48" x 48"	48" x 48"	1685 lbs
AXST80-4856	8000 lbs	30	23"	20"	43"	48" x 48"	56" x 48"	1800 lbs
AXST80-4860	8000 lbs	30	23"	20"	43"	48" x 48"	60" x 48"	1880 lbs

Features

- 2000 - 8000 lb. capacity
- 24" travel
- 30 degree tilt
- Air requirements 80 psi @ 15 cfm
- Lifetime warranty on Firestone Actuator
- Pedestal mounted control
- Optional foot control
- AXST units available in transportable version
- No floor lagging necessary
- Custom platforms available

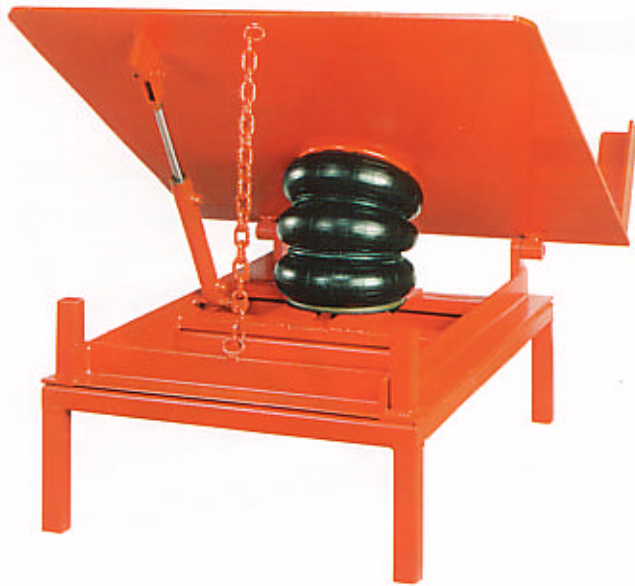

Pneumatic Tilt Tables

Model Number	Tilt Capacity	Degree of Tilt	Lowered Height	Base Size W / L	Platform Size W / L	Shipping Weight
AT10 Series						
AT10 - 3848	1000 lbs	30	7"	36" x 48"	36" x 48"	590 lbs
AT10 - 4848	1000 lbs	30	7"	36" x 48"	48" x 48"	650 lbs
AT10 - 4856	1000 lbs	30	7"	36" x 48"	56" x 48"	700 lbs
AT10 - 4860	1000 lbs	30	7"	36" x 48"	60" x 48"	720 lbs
AT20 Series						
AT20 - 3848	2000 lbs	30	7"	36" x 48"	36" x 48"	640 lbs
AT20 - 4848	2000 lbs	30	7"	36" x 48"	48" x 48"	720 lbs
AT20 - 4856	2000 lbs	30	7"	36" x 48"	56" x 48"	785 lbs
AT20 - 4860	2000 lbs	30	7"	36" x 48"	60" x 48"	815 lbs
AT40 Series						
AT40 - 4848	4000 lbs	30	7"	36" x 48"	48" x 48"	745 lbs
AT40 - 4856	4000 lbs	30	7"	36" x 48"	56" x 48"	800 lbs
AT40 - 4860	4000 lbs	30	7"	36" x 48"	60" x 48"	830 lbs
AT60 Series						
AT60 - 4848	6000 lbs	30	8"	48" x 48"	48" x 48"	840 lbs
AT60 - 4856	6000 lbs	30	8"	48" x 48"	56" x 48"	920 lbs
AT60 - 4860	6000 lbs	30	8"	48" x 48"	60" x 48"	960 lbs

Features

- 2000 - 6000 lb. capacity
- 30 degree tilt
- Air requirements 80 psi @ 15 cfm
- Pedestal mounted control
- Foot or hand control available
- Optional floor stand
- Safety restraining chain to guard against over tilt
- Optional fork pockets
- Lifetime warranty on Firestone Actuator
- Optional motion stabilizer
- Custom designs available


Stationary Container Tilters



Model Number	Tilt Capacity	Degree of Tilt	Fork Length	Lowered Height	Dimensions W/L	Lifting Speed	Shipping Weight
SRT Series							
SRT20	2000 lbs	89	40"	3/8"	33"x58"	23 sec	835 lbs
SRT40	4000 lbs	89	40"	3/8"	33"x58"	24 sec	850 lbs

Features

- 2000 - 4000 lb. capacity
- 89 degree tilt
- Internal 1 HP 115/1/60 power unit
- Push-button hand held control with magnetic backing for mounting
- Optional foot control available
- Compact frame design
- Designed to be lagged down to floor
- Fork pockets allow for easy loading with a pallet jack or forklift
- Flexible safety toe guards on forks
- Custom designs available

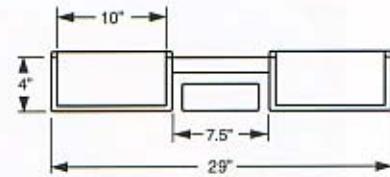

Portable Container Tilters

Model Number	Tilt Capacity	Degree of Tilt	Lowered Height	Fork Length	Fork O.D.	Dimensions W/L	Lifting Speed	Shipping Weight
PT Series - Non-Straddle								
PT - 20	2000 lbs	89	3 1/2"	42"	26 1/2"	34"x62"	26 sec	775 lbs
PT - 40	4000 lbs	89	3 1/2"	42"	26 1/2"	34"x62"	30 sec	790 lbs
PTS Series - 42" I.D. Straddle								
PTS42 - 20	2000 lbs	89	3 1/2"	42"	26 1/2"	48"x62"	26 sec	815 lbs
PTS42 - 40	4000 lbs	89	3 1/2"	42"	26 1/2"	48"x62"	30 sec	835 lbs
PTS Series - 50" I.D. Straddle								
PTS50 - 20	2000 lbs	89	3 1/2"	42"	26 1/2"	52"x62"	26 sec	830 lbs
PTS50 - 40	4000 lbs	89	3 1/2"	42"	26 1/2"	52"x62"	30 sec	850 lbs

Features

- 2000 - 4000 lb. capacities
- 89 degree tilt
- Straddle models for pallets and containers
- Non-straddle models for skids and baskets
- Easy to service internal 1 HP DC motor
- Optional 115 volt AC or air motors available
- Push-button control with magnetic backing
- External 10 amp tapering batter charger
- Presto foot operated floor lock
- Maintenance free, leak-proof gel cell battery
- Push handle lowers when in use
- Custom designs available

